



*Double axis pilot control valve*

**ESJ02A**

Rev. 03 • May, 2023  
TECHNICAL CATALOGUE





## HISTORY OF REVISIONS

DATE	PAGE	CHANGED	REV.
December, 2018	-	First edition	00
January, 2019	18-19-20-26	Updated controls actuation and modified rod levers	01
November, 2019	18-19-29-30	Modified MV-MZ diagrams Added configurations handle	02
May, 2023	18-19-22-27-29-30	Updated metering curves and C03-C04 control actuations. Updated position front electric device arrangement of EHC1 handle. Modified cable specifications	03

## ABOUT THE MANUAL

This manual contains the technical instructions for the servocontrol ESJ02A.  
All information given in this manual is current and valid according to the information available at the time of publication.  
The data specified above only serve to describe the product. EBI Motion controls reserves to modify or revise the instructions without prior notice.

EBI Motion controls is not responsible for any damage caused by an incorrect use of the product.  
Please visit [www.ebimc.com](http://www.ebimc.com) for the most recent version of this manual.

## CONTENTS



4	<b>INTRODUCTION</b>
5	<b>GENERAL INFORMATION</b> HYDRAULIC OPERATING PRINCIPLE
6	<b>GENERAL INSTRUCTIONS</b> INTENDE USE WARRANTY GENERAL SAFETY INSTRUCTIONS WARNING SYMBOL PRODUCT IDENTIFICATION UNITS OF MEASURE - CONVERSION FACTORS
8	<b>DIMENSIONS - HYDRAULIC SYMBOL</b> STANDARD CONNECTIONS
9	<b>PORT DETAILS</b>
10	<b>TECHNICAL DATA</b> HYDRAULIC STANDARD SPECIFICATIONS MATERIAL STANDARD SPECIFICATIONS GENERAL STANDARD SPECIFICATIONS SEALS
11	<b>HYDRAULIC FLUID</b> FLUID CLEANLINESS REQUIREMENTS
13	<b>APPLICATION AND SAFETY GUIDELINES</b> STORAGE OF NEW PRODUCT SAFETY GUIDELINES
14	<b>ORDERING CODES</b> BODY CLASSIFICATION FIXING PLATE RETURN SPRING METERING CURVE CONTROL ACTUATION ROD LEVER CONTROL LEVER



## INTRODUCTION

### SERVOCONTROLS

EBI motion controls servocontrols (joysticks and foot pedals) are used to control the work and drive hydraulics of modern mobile machines with high accuracy, safety and optimal performance. EBI motion controls servocontrols are maintenance free and have a long life cycle, are suited for specialized applications for a variety of mobile equipment such as:



## ESJ02A


### PILOT CONTROL DEVICE IN JOYSTICK DESIGN 2 AXIS SINGLE LEVER

Small dimensions enable simple, compact installation.  
Robust, simple design gives great reliability and easy servicing.  
Progressive and sensitive operation.  
Precise pressure control.  
Low operating effort.  
Control element protected with rubber bellow.  
High durability and Maintenance free.


#### BETTER PROTECTION

##### INTERNAL RUBBER BELLOW OPTION:

to better protect plungers from dirt and contamination.

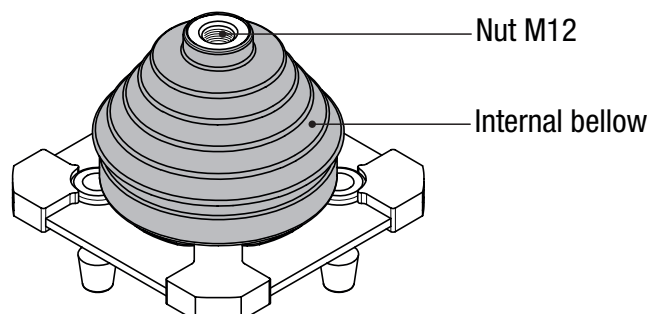

## GENERAL INFORMATION

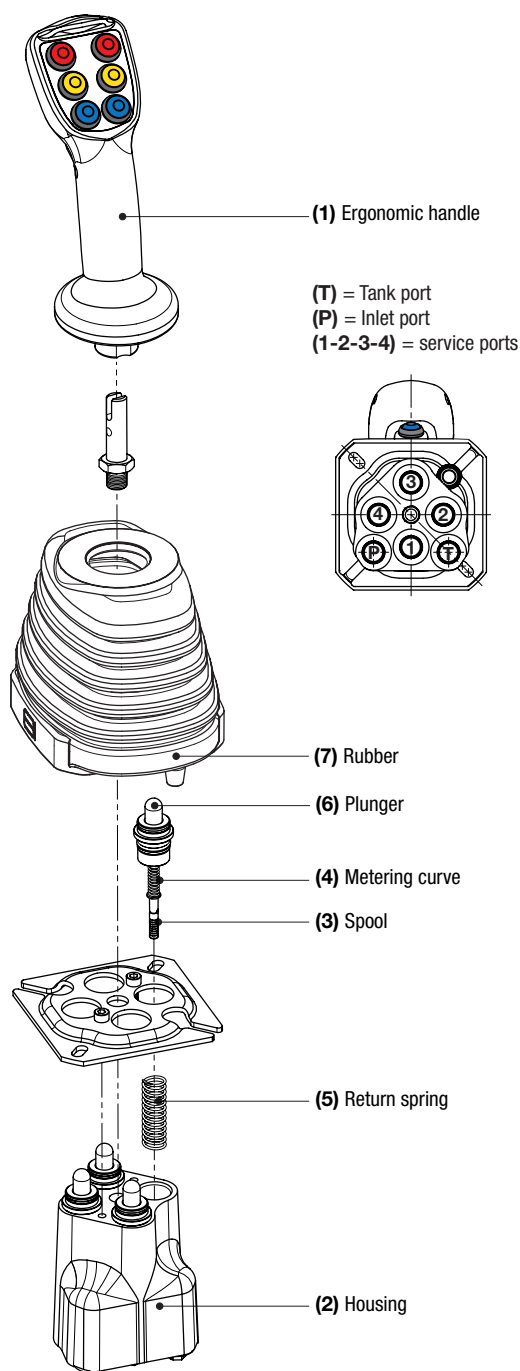


## HYDRAULIC OPERATING PRINCIPLE

Pilot control device ESJ02A operates on the basis of direct operated pressure reducing valves.

ESJ02A basically comprises of an ergonomic handle (1), four pressure adjustment valves and a housing (2). Each pressure adjustment valve consists of a spool (3), a metering curve (4), a return spring (5) and a plunger (6).

When non actuated the ergonomic handle is held in the neutral position by the four return springs (5). Service ports (1, 2, 3, 4) are connected to tank port (T) via the drilling.

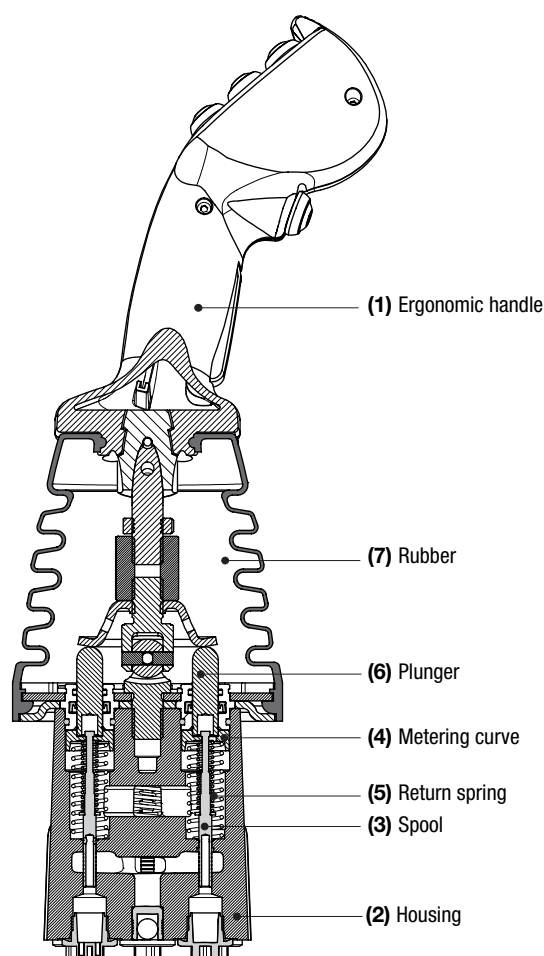

With deflection of the handle (1), the plunger (6) pushes against the return spring (5) and the metering curve (4). The metering curve firstly moves the spool (3) downwards and closes the connection between the appropriate port and tank port (T). At the same time the appropriate port is connected to the inlet port (P) via the drilling.

The control phase begins as soon as the spool (3) has found its balance between the force of the metering curve (4) and the force which results from the hydraulic pressure in the appropriate service port (1, 2, 3 or 4).

Through the interaction of spool (3) and metering curve (4) the pressure in the appropriate ports is proportional to the stroke on the plunger (6) and thus the position of the handle (1).

A rubber bellow (7) protects the mechanical components in the housing (2) against contamination and ensures that the ESJ02A can also be used for the arduous applications.



## GENERAL INSTRUCTIONS

### INTENDED USE

Servocontrol ESJ02A is designed for industrial use.

### WARRANTY

Check the package and the product for transport damage when receiving goods. The package is not meant for long term storage; protect the product appropriately.

Do not dismantle the product. The warranty is void if the product has been disassembled.

The manufacturer is not responsible for damages resulting from misinterpreted, noncompliance, incorrect, or improper use of the product that goes against the instructions given in this document.

### GENERAL SAFETY INSTRUCTIONS

The following instructions apply to all procedures associated with the product. Read these instructions carefully and follow them closely.

- Use necessary personal protective equipment when working with the product.
- Support the product properly; make sure the product cannot fall over or turn around by accident.
- Use only appropriate equipment and attachments for lifting and transferring the product.
- Always use the lifting equipment properly and check the load-bearing capacity.
- Prevent unintended use of the product during installation and maintenance procedures.

### WARNING SYMBOL

The following symbols can be used in this manual:



**Note:**  
Useful information



**Danger:**  
Danger of death or injury



**Attention:**  
May cause damage to the product

## PRODUCT IDENTIFICATION


The product identification data can be found on the identification plate attached to the EBI product.

### SERIAL NUMBER

all manufacturing data and all sales data can be found with the serial number

### PART NUMBER CODE

It is a number univocally identifying the configuration and pressure setting of a valve

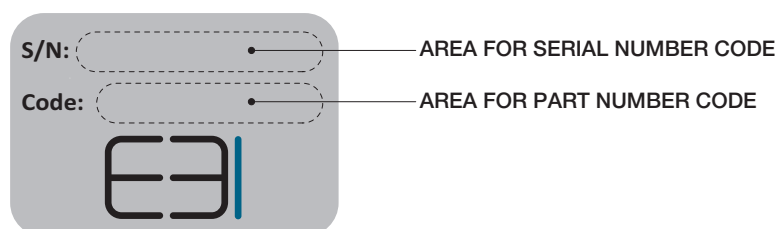

#### Note:





Serial number and part number code have 9 characters (letters and numbers).

## UNITS OF MEASURE - CONVERSION FACTORS

LENGHT	FLOW RATE	MASS	FORCE WEIGHT	PRESSURE
1 mm = 0,0394 in	1 l = 0,2200 gal UK	1 kg = 2,205 lb	1 Nm = 0,1020 Kgf	1 bar = 100000 Pa
1 in = 25,4 mm	1 l = 0,2642 gal US	1 lb = 0,4536 kg	1 Kgf = 9,8067 Nm	1 bar = 14,5 psi
	1 gal UK = 4,546 l			1 Pa = 0,0001 bar
	1 gal UK = 1,2010 gal US			1 Pa = 0,00014 psi
	1 gal US = 3,785 l			1 psi = 0,0689 bar
	1 gal US = 0,8327 gal UK			1 psi = 6890 Pa

## DIMENSIONS - HYDRAULIC SYMBOL

This drawing represents a ESJ02A, standard assembly and BSP configuration.

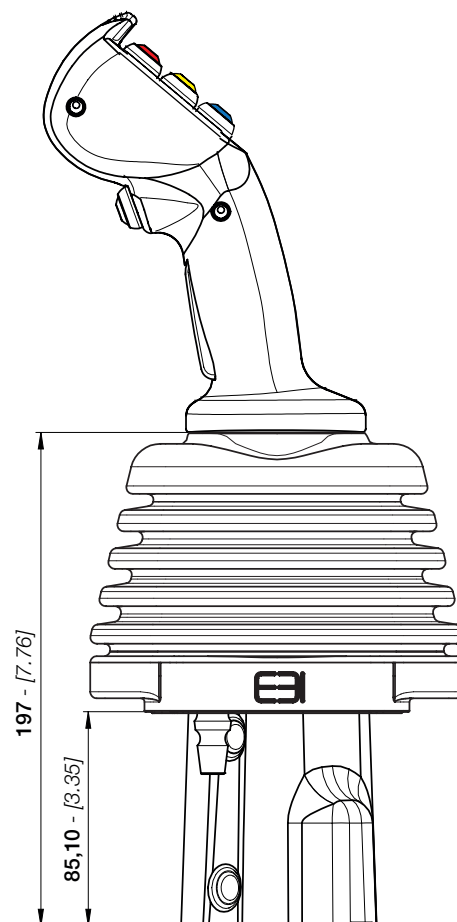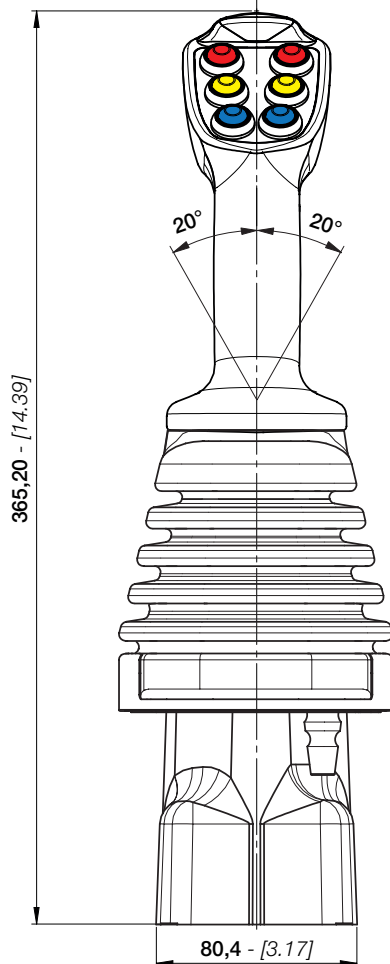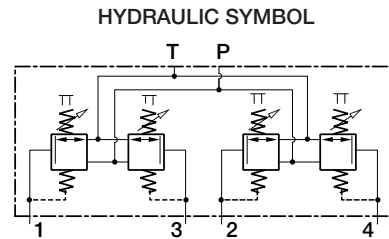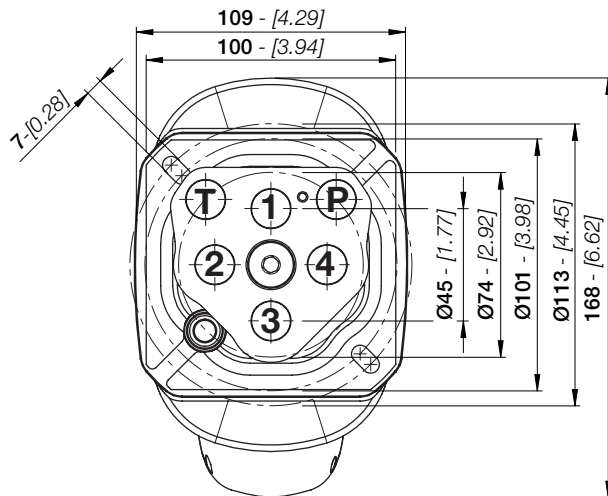


## STANDARD CONNECTIONS


TYPE	BSP ISO 1179-1	UN-UNF ISO 11926-1
INLET - P	G 1/4	9/16-18 UNF
PORTS - A/B	G 1/4	9/16-18 UNF
OUTLET - T	G 1/4	9/16-18 UNF



## PORT DETAILS

The connection port size is indicated by an ordering code common for all EBI products.  
Following tables show all available connections.

BSP THREADS ISO 1179-1	D		C		B		A		CODE
	UNI-ISO 228		mm	inc	mm	inc	mm	inc	
	G 1/4		13	0.51	19	0.75	1	0.094	1B
	G 3/8		13	0.51	25	0.98	1	0.04	2B
	G 1/2		15	0.59	29	1.14	1.5	0.06	3B
	G 3/4		17	0.67	36	1.42	1.5	0.06	4B
	G 1		19	0.75	45	1.77	2	0.08	5B

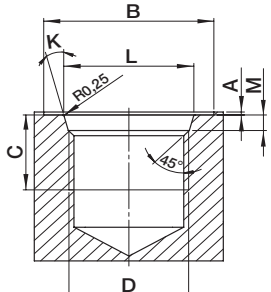UN/UNF THREADS ISO 11926-1	D		C		B		L		M		K	A		CODE
	ASA-B1-1		mm	inc	mm	inc	mm	inc	mm	inc		mm	inc	
	9/16-18 UNF (SAE6)		13	0.51	26	1.02	15.6	0.61	2.5	0.098	12°	1	0.04	1S
	3/4-16 UNF (SAE8)		15	0.59	30	1.18	20.6	0.81	2.6	0.102	15°	1.5	0.06	2S
	7/8-14 UNF (SAE10)		17	0.67	34	1.34	23.9	0.94	2.6	0.102	15°	1.5	0.06	3S
	1"1/16-12 UNF (SAE12)		20	0.79	41	1.61	29.2	1.15	3.3	0.13	15°	1.5	0.06	4S
	1"5/16-12 UNF (SAE16)		20	0.79	50	1.97	35.5	1.40	3.3	0.13	15°	2	0.08	5S



## TECHNICAL DATA

All performances in this catalogue are obtained using mineral based hydraulic oil 46 cSt viscosity at 40°C (ISO VG 46 viscosity class). All ESJ02A go through functional testing at these conditions before shipment.

### HYDRAULIC STANDARD SPECIFICATIONS

Maximum input pressure .....	100 bar - [1450 psi]
Maximum back pressure on tank line .....	3 bar - [43,5 psi]
Control max flow on ports.....	15 l/min - [4 GPM]
Hysteresis .....	< 1 bar - [< 14,5 psi]
Hydraulic fluid .....	Mineral Oil HL, HLP (DIN 51524) phosphate ester (HFD-R)
Fluid temperature range .....	-20°C +80°C [-4°F +176°F]
Fluid viscosity range .....	10 ÷ 380 cSt
Max contamination level .....	9 (NAS 1638) - 20/18/15 (ISO 4406:1999)
Recommended filtration .....	B10 > 75 - (ISO 16889:20008)
Leakage (single port) .....	3 cm³/min - (with 100 bar of pressure)

### MATERIAL STANDARD SPECIFICATIONS

Body material .....	Cast iron
Plunger material .....	Stainless steel
Plunger guide material .....	Brass

### GENERAL STANDARD SPECIFICATIONS

Type of connection .....	BSP thread (ISO 1179-1) - SAE thread (ISO 11926-1)
--------------------------	--

### SEALS

**O-Rings:** **Buna N** (acrylonitrile butadiene), also named **NBR** (according to ASTM), compatible with fluids having mineral oil base, water in oil emulsions, and water glycol fluids.

These seals are standard for temperatures within the range -20°C and +80°C

**Back-up rings and Slide rings:** **strengthened PTFE** (Politetrafluoroetilene like Teflon®, Lubriflon®, Ecoflon®, or similar).

Special FPM (Viton®) seals are available on request.

**Note:** the seal materials are compatible with the fluids normally used in hydraulic systems; in case of special fluids, if you suspect incompatibility between the fluid used and the standard seals, contact the EBI motion controls service network.

## HYDRAULIC FLUID

Mineral oil based hydraulic fluids suitable for hydraulic systems can be used; they should have physical lubricating and chemical properties as specified by:

MINERAL OIL BASED HYDRAULIC FLUIDS HL (DIN 51524 part 1)

MINERAL OIL BASED HYDRAULIC FLUIDS HLP (DIN 51524 part 2)

For use of environmentally friendly fluids (vegetable or polyglycol base), or other fluids, please contact EBI.

OIL AND SOLUTIONS - ISO 6743/4	(°C) MIN	(°C) MAX	COMPATIBLE SEAL
Mineral Oil HL, HM or HLP	-25	+80	NBR
Oil in water emulsion HFA	+5	+55	NBR
Oil in water emulsion HFB	+5	+55	NBR
Polyglycol-based aqueous solution HFC	-10	+60	NBR

Hydraulic fluids are available in different viscosity classes identified by the ISO VG number, which corresponds to the kinematic viscosity at 40°C. Here is a table showing typical viscosity changes between 0°C and 100°C for mineral oil based fluids having various viscosity classes. The fluid should be selected with the aim to achieve an appropriate operating viscosity at the expected working temperature.

VISCOSITY CLASS AND FILTRATION DATA			
Viscosity class	kinematic viscosity (cSt)		
	maximum (0° C)	medium (40° C)	minimum (100° C)
ISO VG 10	90	10	2.4
ISO VG 22	300	22	4.1
ISO VG 32	420	32	5.0
ISO VG 46	780	46	6.1
ISO VG 68	1400	68	7.8
ISO VG 100	2560	100	9.9

## FLUID CLEANLINESS REQUIREMENTS

The cause of malfunctions in hydraulics is often found to be excessive fluid contamination. The hard contaminant particles in the fluid wear the hydraulic components and prevent the poppets from re-seating, with consequent internal leakage and system inefficiency. For the correct operation it is necessary to adopt filtration methods which guarantee for life the specified fluid cleanliness level. It is important to ensure that hydraulic fluids are brought to the appropriate cleanliness level prior filling up the systems, and, when in doubt, also to flush the hydraulic components prior to installation.

### FILTRATION RATIO $BETA_x$ :

It is the ratio between the number of particles before and after the filter with diameter larger than X micron.

### ABSOLUTE FILTRATION RATIO ISO 4572:

It is the diameter X of the largest particle with  $BETA_x \geq 75$ .

**CONTAMINATION CLASS ISO 4406:**

It is expressed by 3 scale numbers representing respectively: the number of particles equal to or larger than 4µm, the number of particles equal to or larger than 6µm, the number of particles equal to or larger than 14µm contained in 1 ml of fluid.

**CONTAMINATION CLASS NAS 1638:**

It is expressed by one scale numbers representing the number of particles of different size ranges contained in 1 ml of fluid.

FILTRATION RECOMMENDATION				
Type	Nominal filtration (micron)	Absolute filtration rating ISO 4572 (BETA <sub>x</sub> ≥75)	Contamination class	
			ISO 4406	NAS 1638
System/components operating at <i>HIGH PRESSURE &gt; 250 bar</i> <i>HIGH DUTY CYCLE APPLICATIONS</i> Systems/components with <i>LOW</i> dirt tolerance	10	X = 10... 12	19/17/14	8
System/components operating at <i>MEDIUM HIGH PRESSURE</i> <i>HIGH DUTY CYCLE APPLICATIONS</i> Systems/components with <i>MODERATELY</i> dirt tolerance	15	X = 12... 15	20/18/15	9
System/components operating at <i>LOW PRESSURE &lt; 100 bar</i> <i>LOW DUTY CYCLE APPLICATIONS</i> Systems/components with <i>GOOD</i> dirt tolerance	25	X = 15... 25	21/19/16	10

**Attention:**

If the filtration demands are not met, the valve poppets can jam in the open position, with the result that the valve remains actuated. It is not possible to force back jammed poppets mechanically.

## APPLICATION AND SAFETY GUIDELINES

### STORAGE OF NEW PRODUCTS

Encapsulated by a protective wrapping, the products shall not be exposed to direct sunlight nor to source of heat or ozone and kept in a dry place at a temperature between -20°C +50°C.

### SAFETY GUIDELINES

During any operation on servocontrols, it is recommended to pay attention to components surfaces temperature.

The circuit functions are to be so designed that uncontrolled machine movements, caused by the application, are prevented and that it is possible to switch from one function to another.

Take into account all of the application limits, particularly those application limits stated within this technical catalogue.

It is recommended to follow these steps and only trained and competent personnel may carry out any work on EBI motion controls servocontrols:

- Do not direct the jet of a pressure washing unit directly to the unit.
- During operation protection via the rubber boot must be ensured.
- Ensure that all matching surfaces are clean, without contamination.
- Ensure that all seals and back-up rings for the matching surfaces are flawless and correctly placed.
- Do not put any sealing material other than the standard seals.
- During the assembly of the complete servocontrol and/or the group of servocontrol, refer to the hydraulic scheme and to the name assigned to each port.
- Do not hang the servocontrol and/or the group of servocontrol to the hydraulics pipes, but always use the specific fixing holes.
- Place in position the servocontrol, then, by hand, insert the fittings and the locating screws.
- Finally tighten with a calibrated torque wrench and torque up to the specifications shown in the catalogue.
- Use gloves in order to avoid accidental injuries during installation or maintenance.
- Do not grab / handle product from moving parts (i.e. cables, levers,...etc.)
- All servocontrols or groups of servocontrols are attributable to pressure vessels. It's always recommended to place the components in a closed but ventilated compartment, able to protect the environment and users in case of accidental ejection of material under pressure (fittings, pipes, plugs expander... etc.)
- Do not tamper with the servocontrol.
- Before removing or disassembling the complete servocontrol or allowed parts ( as pressure gauge ports, purge plugs, ...etc) it is strongly recommended to vent all hydraulic pressure from the system.
- During the first start of the machine, please ensure that the grounding system is connected and stay away from moving parts.
- In case of allowed adjustments on the valve, any maximum value indicated in catalogue must not be exceeded.




**Attention:**

These guidelines are not intended to be considered as complete

## ORDERING CODES

The order code below provides an example of servocontrol ESJ02A with standard configuration. This example represents a ESJ02A with ergonomic handle EHC1 and SAE configuration. See pages 15 - 28 for more information about the different options available.

product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

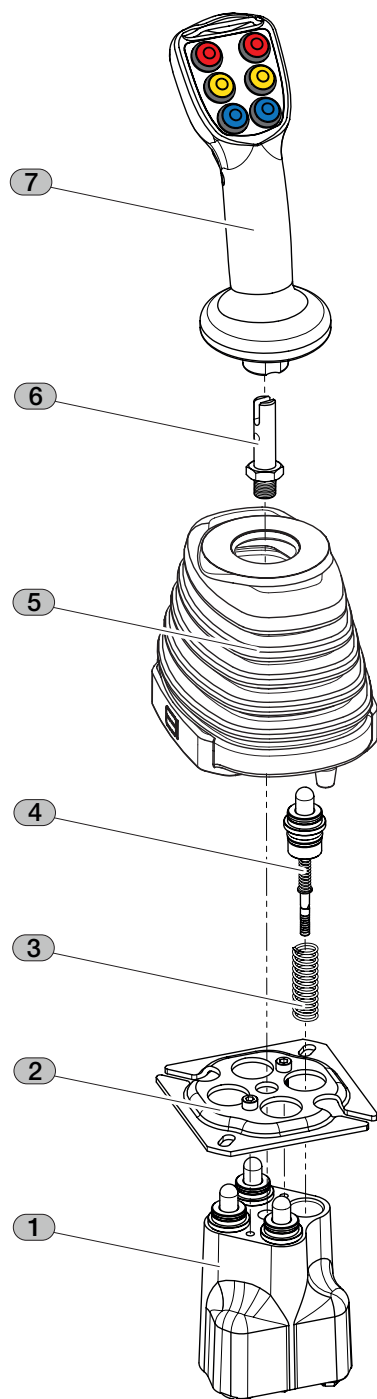

POSITION	CODE	DESCRIPTION	PAGE
1	<b>BJA11S</b>	Body classification	15
2	<b>FP1</b>	Fixing plate	16
3	<b>S1</b>	Return spring (port 1)	17
4	<b>MV01</b>	Metering curve (port 1)	18
3	<b>S1</b>	Return spring (port 2)	17
4	<b>MV01</b>	Metering curve (port 2)	18
3	<b>S1</b>	Return spring (port 3)	17
4	<b>MV01</b>	Metering curve (port 3)	18
3	<b>S1</b>	Return spring (port 4)	17
4	<b>MV01</b>	Metering curve (port 4)	18
5	<b>C03</b>	Control actuation	20
6	<b>L1</b>	Rod lever	23
7	<b>EHC1</b>	Control lever	24
	<b>F06</b>	Front buttons arrangement	
	<b>R03</b>	Rear buttons arrangement	
	<b>A</b>	Handle positions	




### Note:

Ordering code for position 3 and 4 must be repeated for each port.


BODY CLASSIFICATION

product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

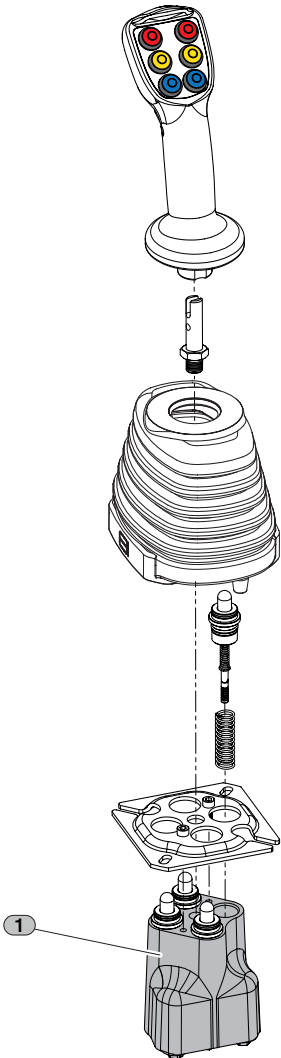

ESJ02A body arrangement is available in two configurations: SAE thread or BSP thread.  
For different applications, contact our Sales Office.

Example of body arrangement with BSP ports:

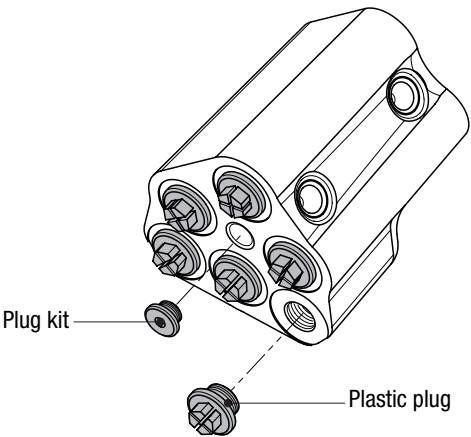


**Note:**  
All arrangement bodies are equipped with 1 plug kit and 6 plastic plugs.

CODE	DESCRIPTION
BJA11S	Standard body with ports 9/16"-18 UNF (SAE6)
BJA11B	Standard body with ports G 1/4

DRAWING


(T) = Tank port  
(P) = Inlet port  
(1-2-3-4) = service ports



**Note:**  
On request it is available body arrangement with shuttle valves. This application requires a special casting and special configuration.

## FIXING PLATE


product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

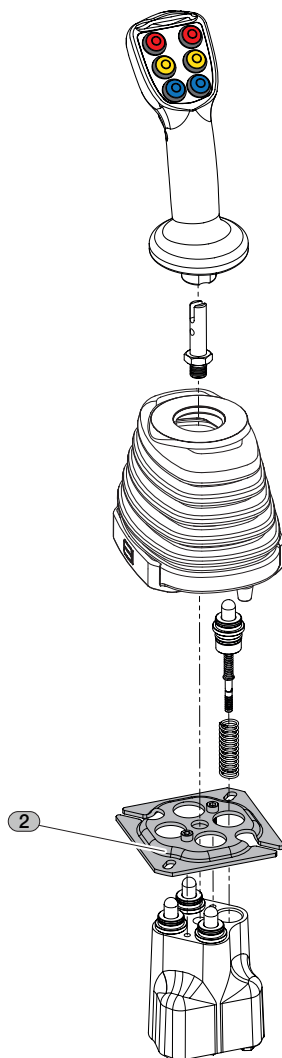

The fixing plate allows the correct installation of the ESJ02A servocontrol on the customer machine system.

The following is the standard fixing plate (FP1).

For different dimensions or different applications, contact our Sales Office.

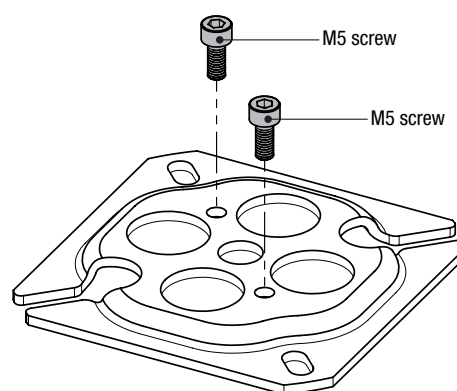

### Note:

The fixing plate contains 2 screws which allow correct assembly with the body.


### CODE

### DESCRIPTION

FP1

Standard fixing plate


### DRAWING

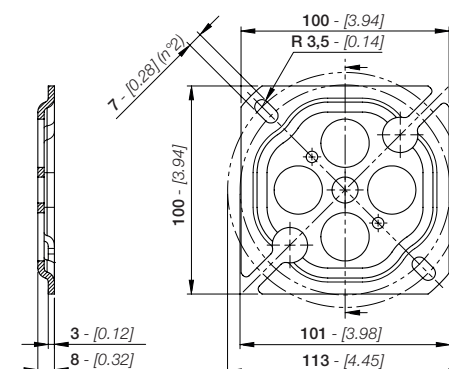



RETURN SPRING

product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

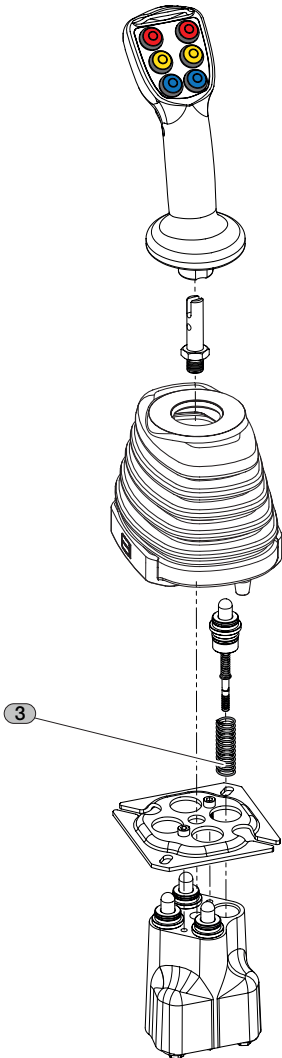

All ESJ02A servocontrols are equipped with 4 return springs (one spring each service port).


Two types of springs are available; the relative values are shown here below.

For different values or different applications please contact our Sales Office.



Note:


Ordering row 3, must be repeated for each port.



CODE	PRELOAD		END STROKE LOAD	
	Nm	Kgf	Nm	Kgf
S1	15	1,53	28	2,86
S2	24	2,45	40	4,08

## METERING CURVE

product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

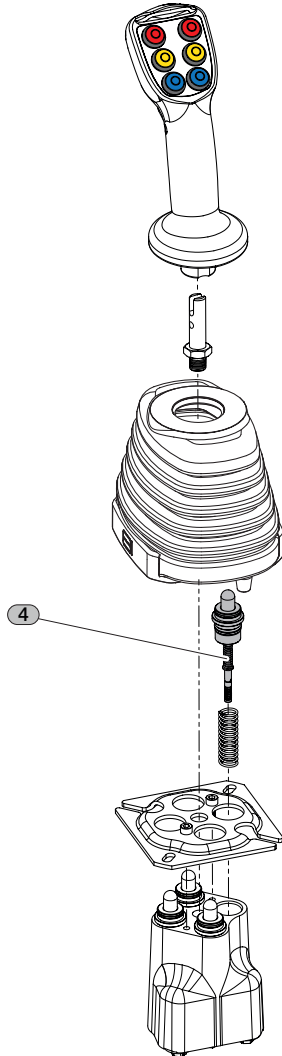

All ESJ02A servocontrols are equipped with 4 metering curves (one metering curve each service port).


The metering curve classification depends on the control pressure (bar - *psi*) and stroke length (mm - *in*).

Currently two types of metering curves are available:

- Linear curve with step (MV type)
- Linear curve without step (MZ type)

All metering curves are interchangeable.

For different values or different applications please contact our Sales Office.

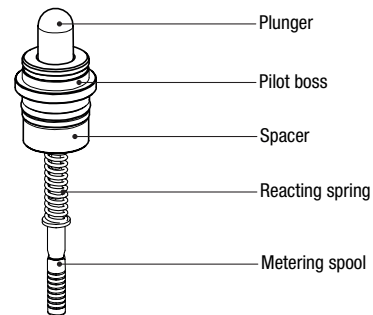


### Note:

Ordering row 4 must be repeated for each port.


CODE	PRESSURE				STROKE			
	P1		P2		S1		S2	
	bar	psi	bar	psi	mm	in	mm	in
MV01	5	72.5	25	362.5	1.2	0,05	7.2	0,28
MV02	5.8	84,1	19.5	282,7	1.2	0,05	7.2	0,28
MV03	5	72,5	22	319	1.2	0,05	7.2	0,28
MV04	5	72,5	15	217.5	1.2	0,05	7.2	0,28
MV05	5	72,5	20	290	1.2	0,05	7.2	0,28
MV06	7.5	108,8	29	420,5	1.2	0,05	7.2	0,28
MV07	8	116	28	406	1.2	0,05	7.2	0,28
MV08	2	29	18	261	1.2	0,05	7.2	0,28
MV10	7	101.5	17	246.5	1.2	0,05	7.2	0,28
MV11	3	43.5	22.2	321.9	1.2	0,05	7.2	0,28
MV12	6.8	98.6	23.5	340.8	1.2	0,05	7.2	0,28
MV13	3	43.5	28	406	1.2	0,05	7.2	0,28
MV14	14.7	213.2	28.4	411.8	1.2	0,05	7.2	0,28
MV16	2	29	11.5	166.8	1.2	0,05	7.2	0,28
MV21	5.8	84.1	18.3	265.4	1.2	0,05	7.2	0,28
MV22	3.5	50.8	13.5	195.8	1.2	0,05	7.2	0,28
MV26	2	29	26	377	1.2	0,05	7.2	0,28
MV35	5	72.5	13.8	200.1	1.2	0,05	7.2	0,28
MV36	5	72.5	18.2	263.9	1.2	0,05	7.2	0,28
MV37	10	145	20	290	1.2	0,05	7.2	0,28
MV40	6	87	40	580	1.2	0,05	7.2	0,28

### MV

linear curve with step

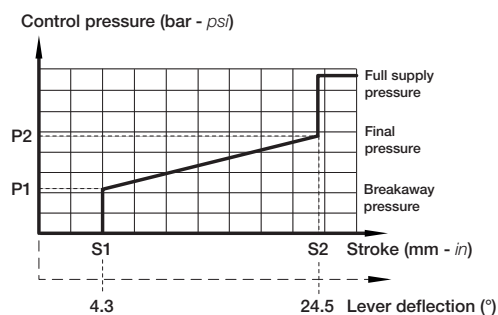


CODE	PRESSURE				STROKE			
	P1		P2		S1		S2	
	bar	psi	bar	psi	mm	in	mm	in
MZ01	5	72.5	25	362.5	1.2	0,05	8	0,32
MZ02	5.8	84,1	19.5	282,7	1.2	0,05	8	0,32
MZ03	5	72,5	22	319	1.2	0,05	8	0,32
MZ04	5	72,5	15	217.5	1.2	0,05	8	0,32
MZ05	5	72,5	20	290	1.2	0,05	8	0,32
MZ06	7.5	108,8	29	420,5	1.2	0,05	8	0,32
MZ07	8	116	28	406	1.2	0,05	8	0,32
MZ08	2	29	18	261	1.2	0,05	8	0,32
MZ15	5	72.5	16.3	236.4	1.2	0,05	8	0,32
MZ23	1.2	17.4	18.9	274.1	1.2	0,05	8	0,32
MZ25	4	58	18	261	1.2	0,05	8	0,32
MZ27	5.5	79.8	29	420.5	1.2	0,05	8	0,32
MZ28	3	43.5	24.8	359.6	1.2	0,05	8	0,32
MZ33	2	29	19.3	279.9	1.2	0,05	8	0,32

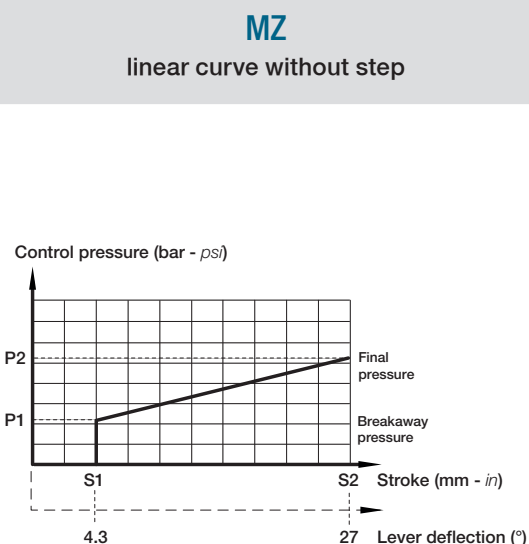

On request are available broken line metering curves with step and broken line metering curves without step. For different values or different applications please contact our Sales Office.

## CONTROL ACTUATION

product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

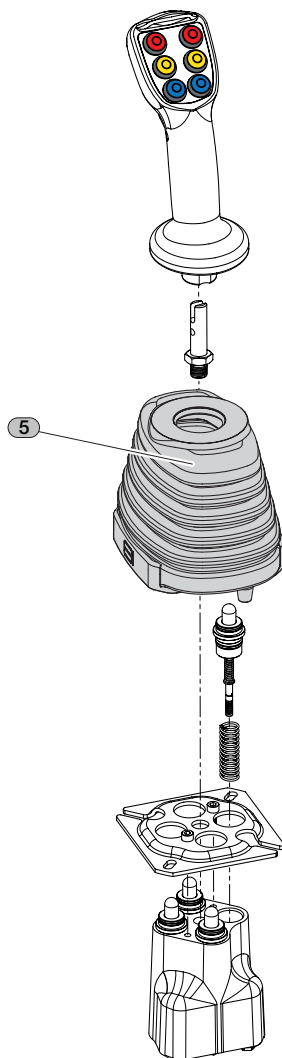

Several different types of controls actuation are available; the controls shown correspond to standard arrangement with bellows for bent lever rod.

All controls actuation type are interchangeable.

The choice of control actuation is directly linked to the choice of the rod levers and the relative handles.

In the tables on the next page all the available control actuation choices are shown.

ESJ02A joystick is available in 3 configuration:

- STANDARD CONFIGURATION WITH STRAIGHT LEVER
- CONFIGURATION FOR LEFT HAND WITH BENT LEVER
- CONFIGURATION FOR RIGHT HAND WITH BENT LEVER


Each configuration uses the corresponding control actuation:

**C01L** = actuation for LEFT hand

**C03** = actuation standard

**C01R** = actuation for RIGHT hand

The position of the handle, respect to the body, changes according to the type of actuation (see page 25).

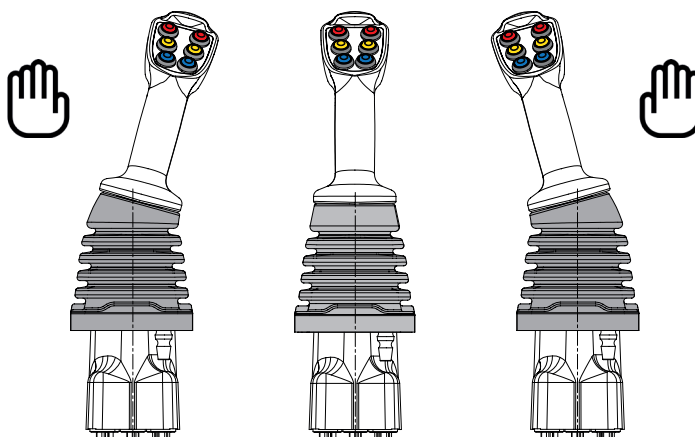

Example with actuation **C01L**

Example with actuation **C03**

Example with actuation **C01R**



### Note:

On request it is available control actuation with mechanical detent in one service port; user port where to apply mechanical detent must be specified.

### ORDER EXAMPLE:

ESJ01A BJA11S FP1 S1 MV01 S1 MV01 S1 MV01 S1 MV01 **C05 1** L1 EHC1 F06 R03 A

**1** = indicates the number of the service port

## CONTROL ACTUATION FOR JOYSTICK ESJ02A









In this table are shown the control actuation available with straight and bent lever rod.

Each control actuation contains an M12 fastening nut.

**Note:**


If your application requires a joystick without handle, you must choose one of the following controls actuation; In these case do not provide the assembly of the lever rod.

CODE	DESCRIPTION	DRAWING	CONFIGURATION
C01L	Control actuation with standard bellow for BENT lever rod <b>ONLY WITH ACTUATION FOR LEFT HAND</b>		
C01R	Control actuation with standard bellow for BENT lever rod <b>ONLY WITH ACTUATION FOR RIGHT HAND</b>		
C02L	Control actuation with double bellow for BENT lever rod <b>ONLY WITH ACTUATION FOR LEFT HAND</b>		
C02R	Control actuation with double bellow for BENT lever rod <b>ONLY WITH ACTUATION FOR RIGHT HAND</b>		

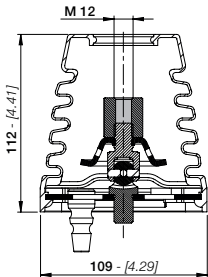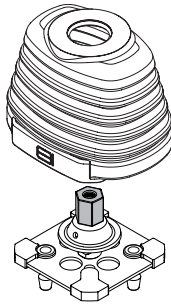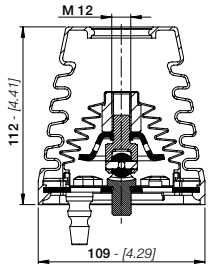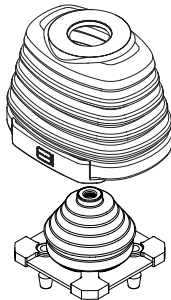CODE	DESCRIPTION	DRAWING	CONFIGURATION
C03	Control actuation with standard bellow for STRAIGHT lever rod		
C04	Control actuation with double bellow for STRAIGHT lever rod		
C00	Control actuation without bellows		
C10	Control actuation with internal protection bellows		

ROD LEVER

product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

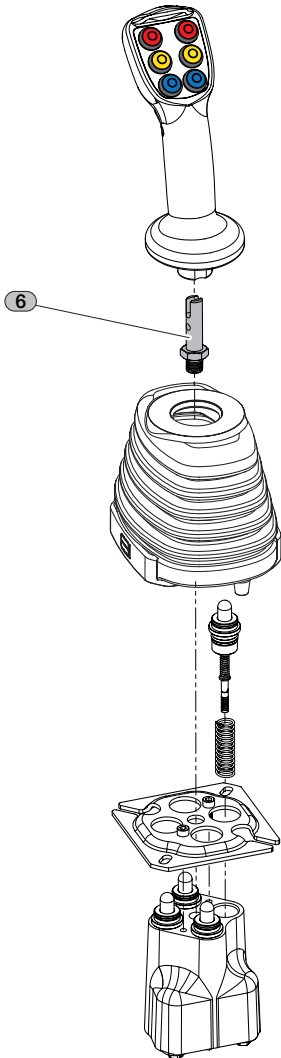

All ESJ02A servocontrols are equipped with a rod lever.  
The rod lever kit changes according to the type of control  
actuation lever and the type of handle. Straight and bent  
lever are available.  
For different applications please contact our Sales Office.




**Note:**  
The choice of the rod lever kit is not provided  
in the joysticks configured without handle.

ROD LEVER FOR HANDLE - EHC1

CODE	DESCRIPTION	DRAWING
L1	Straight lever kit <i>available with control: C03-C04</i>	
L2	Bent lever kit <i>(available with control: C01L-C01R-C02L-C02R</i>	



**Note:**  
Each rod lever kit for EHC1, includes  
a rod lever, a M12 nut and a spring  
pin 5X25. This example shows a rod  
lever kit for a joystick with straight  
lever (code L1)

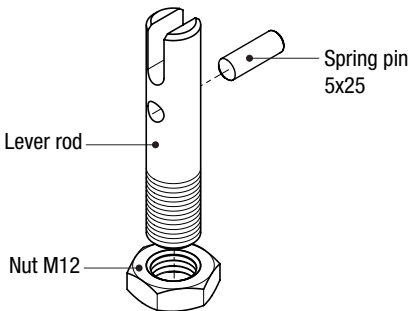


ROD LEVER FOR HANDLE - EHM1 / EHM2 / EHM3

CODE	DESCRIPTION	DRAWING
L3	Straight lever kit <i>available with control: C03-C04</i>	
L4	Bent lever kit <i>(available with control: C01L-C01R-C02L-C02R</i>	

## CONTROL LEVER

product	1	2	3	4	3	4	3	4	3	4	5	6	7
ESJ02A	BJA11S	FP1	S1	MV01	S1	MV01	S1	MV01	S1	MV01	C03	L1	EHC1 F06 R03 A

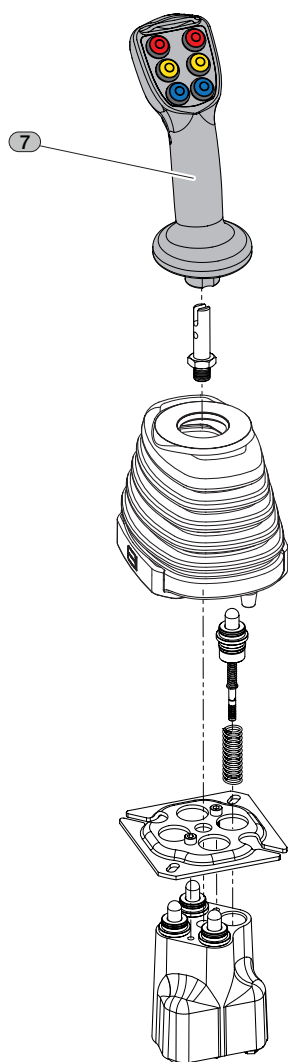

EBI handles are designed to guarantee flexibility and high level of customization. Each control levers are interchangeable.

The handle identified with EHM1, EHM2 and EHM3 have been designed to equip the vast range of earth-moving machines; these handles can be set up to have, or not, a micro-switch. EHC1 is a multifunctional configurable handle. For different applications please contact our Sales Office.

CODE	DESCRIPTION	DRAWING
EHC1	Multifunctional configurable handle	
EHM1	Handle without micro-switch	
EHM2	Handle with one micro-switch	
EHM3	Handle with dual micro-switch	
EHS2	Handle with lens	
EHS4	Handle with knob	



### Note:


The handles can be set up with lever rod; this choice depends on the choice of the control actuation type (see page 20).

EHS2 and EHS4 handles do not require the choice of the lever rod kit. The lever rod is already included in the handle kit.



## EHM HANDLES

The handle families identified with EHM have been designed to equip the vast range of earth-moving machines including mini-excavators, mini-loaders, tractors, etc. These handles can be set up to have or not a microswitch.


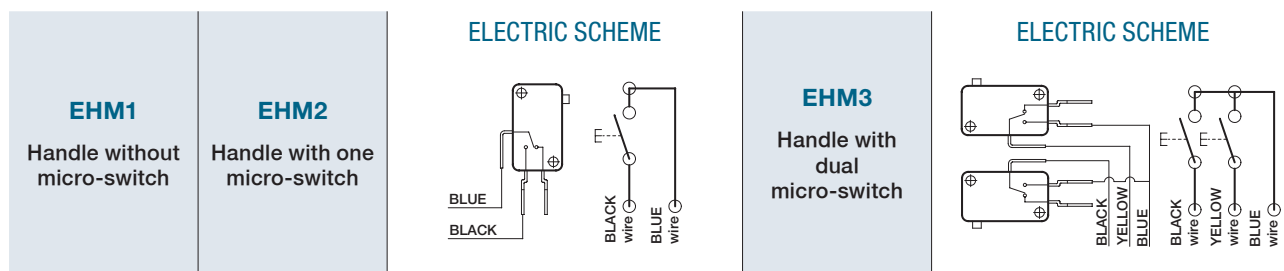


## EHC1 HANDLE

EHC1 is a multifunctional configurable handle designed for EBI servocontrols.


It is designed to guarantee flexibility and high level of customization. The ergonomic shape allows long duty cycles and excellent comfort for the operator. A wide range of configurable options (buttons, rollers, switches, rockers) allow to fit various machines design in terms of shape, layout and color.

- Ergonomic handle
- ON/OFF and proportional functions
- Multiple Roller options
- Rocker switch
- Enable trigger control
- IP configuration driven
- Configurable options combination
- Color and logo personalization on request

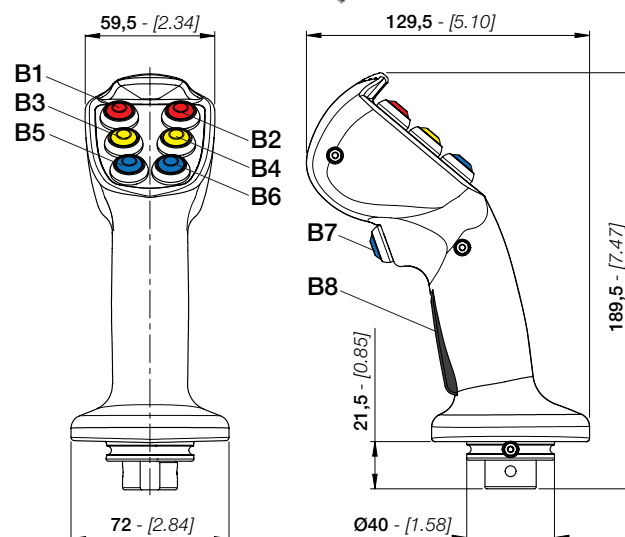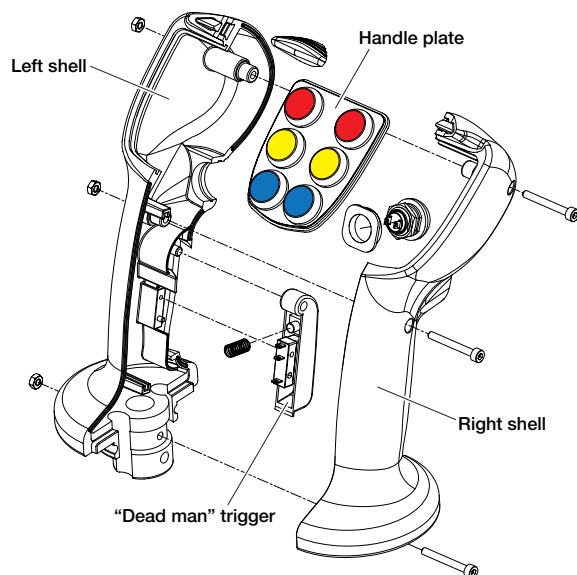

## BUTTONS COLOURS SPECIFICATIONS

- Button B1 - B2 ..... **red**  
 Button B3 - B4 ..... **yellow**  
 Button B5 - B6 - B7 ..... **blue**  
 B8 (button for safety, "dead man") ..... **black**  
 Roller R1 (vertical left) ..... **black**  
 Roller R2 (vertical right) ..... **black**  
 Roller R3 (horizontal) ..... **black**  
 Rocker R4 (ON/OFF/ON) ..... **red**

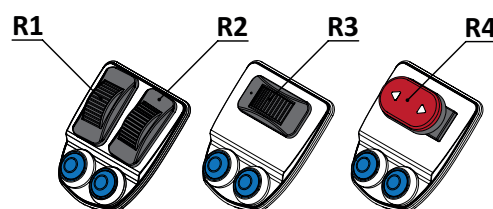




## ELECTRIC DEVICE SPECIFICATIONS

## SEALED PUSH BUTTON SWITCHES



Front panel sealing according to IEC 60529 .....	<b>IP67</b>
Shock resistance .....	<b>100 g</b> according to IEC 512-4, test 6c
Vibration resistance .....	<b>10-500 Hz - 10 g</b> according to IEC 512-4, test 6d
Salt spray .....	<b>IEC 512-4, test 11f</b>
Operating temperature .....	<b>-40°C to +85°C [-40°F +185°F]</b>
Max. current/voltage rating with resistive load .....	<b>5 A / 12 VDC - 5 A / 24 VDC</b>
Initial contact resistance .....	<b>50 mΩ max.</b>
Insulation resistance .....	<b>1 GΩ min. at 500 VDC</b>
Dielectric strength .....	<b>1.000 Vrms</b>
Electrical life at full load .....	<b>500.000 cycles</b>
Typical operating force .....	<b>4 N ± 3 N</b>
Low level or mechanical life .....	<b>1.000.000 cycles</b>

## ROLLER SWITCH



Sealing according to IEC 60529 .....	<b>IP67</b>
Power supply .....	<b>9 - 32 VDC</b>
Power current consumption .....	<b>24 mA</b>
Power output current .....	<b>1 mA</b>
Operating temperature .....	<b>-40°C to +85°C [-40°F +185°F]</b>
Output signal range .....	<b>0,5 - 4,5 V</b>
Center output signal .....	<b>2,5 V ± 0,1 V</b>
Signal tolerance (center position / stroke end) .....	<b>± 100 mV</b>
Minimum load .....	<b>10 Ω</b>
Travel angle .....	<b>± 30°</b>
Typical operating force .....	<b>2,4 N</b>
Low level or mechanical life .....	<b>5.000.000 cycles</b>

## ROCKER SWITCH



Sealing according to IEC 60529 .....	<b>IP67</b>
Actuation type .....	<b>direct</b>
Switching function .....	<b>SPDT - center OFF</b>
Rating IEC .....	<b>16 (4) A 250 V AC 1E4</b>
Rating North America .....	<b>16 A 125 V AC 1/3 HP - 16 A 250 V AC 1/2 HP</b>
Operating temperature .....	<b>-40°C to +85°C [-40°F +185°F]</b>
Inrush peak current (capacitive) .....	<b>120 A</b>
Contact resistance .....	<b>&lt; 100 Ω (12 V, 1 A DC)</b>
Insulation resistance .....	<b>&gt; 100 Ω (500 V DC between open contacts)</b>
Insulation distance .....	<b>≥ 8 mm</b>
Plug force of the terminals .....	<b>≤ 80 N</b>
Mechanical life endurance .....	<b>1.000.000 cycles</b>

## “DEAD MAN” PUSH BUTTON
















Rated amperage .....	<b>up to 3 A inductive</b>
Inlet protection rating (microswitch) .....	<b>IP67</b>
Version .....	<b>Spring return</b>
Contact type .....	<b>NA</b>
Mechanical life endurance .....	<b>1.000.000 cycles</b>
Electric life endurance .....	<b>200x10<sup>3</sup> cycles</b>

## EHC1 ORDERING CODE





handle				1			2			3
E	H	C	1	F	0	6	R	0	3	A







POSITION	CODE	DESCRIPTION	PAGE
1	<b>F06</b>	Front electric device arrangement	27
2	<b>R03</b>	Rear electric device arrangement	27
3	<b>A</b>	Handle position (respect to the body)	28

## FRONT ELECTRIC DEVICE ARRANGEMENT

<b>F00</b>		<b>F05</b>		<b>F22</b>	
<b>F01</b>		<b>F06</b>		<b>F31</b>	
<b>F02</b>		<b>F11</b>		<b>F32</b>	
<b>F03</b>		<b>F12</b>		<b>F51</b>	
<b>F04</b>		<b>F21</b>		<b>F52</b>	

## REAR ELECTRIC DEVICE ARRANGEMENT

<b>R00</b>		handle <b>WITHOUT</b> button and "dead man"	<b>R02</b>		handle <b>WITH</b> "dead man"
<b>R01</b>		handle <b>WITH</b> button	<b>R03</b>		handle <b>WITH</b> button and "dead man"

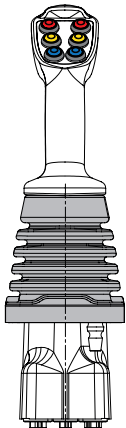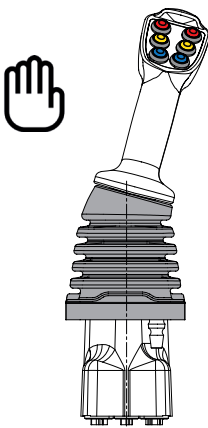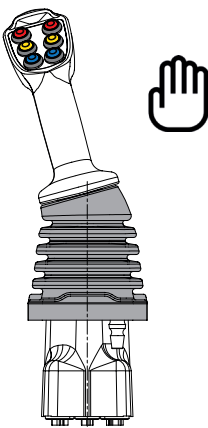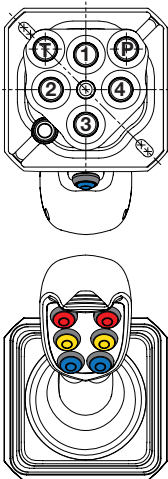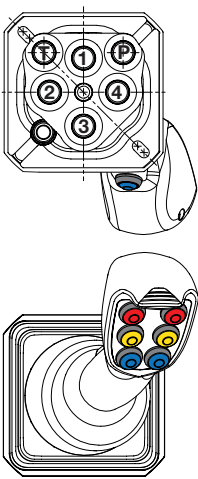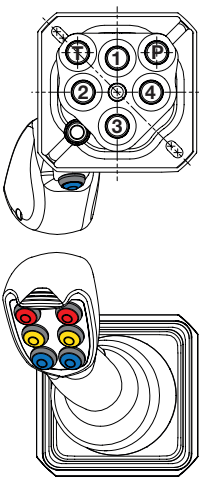HANDLE POSITION (RESPECT TO THE BODY)		
STRAIGHT LEVER	BENT LEVER (LEFT HAND)	BENT LEVER (RIGHT HAND)
		
<b>A</b>	<b>B</b>	<b>C</b>
		
Code A is available only with joystick assembled with STRAIGHT lever kit ( <b>L1</b> or <b>L3</b> ) and control actuation ( <b>C03</b> - <b>C04</b> ).	Code B is available only with joystick assembled with BENT lever kit ( <b>L2</b> or <b>L4</b> ) and control actuation ( <b>C01L</b> - <b>C02L</b> ).	Code C is available only with joystick assembled with BENT lever kit ( <b>L2</b> or <b>L4</b> ) and control actuation ( <b>C01R</b> - <b>C02R</b> ).

## CABLE SPECIFICATIONS

Number of conductors .....	<b>16 max</b>
Conductor material .....	<b>copper with tinned ends</b>
Conductor section .....	<b>AWG16 - AWG20</b>
Insulating material .....	<b>PVC</b>
Protective covering material .....	<b>fireproof polyurethane</b>
Useful cable lenght .....	<b>700 mm</b>



All EBI handles are wired with numbered cables.

Each position indicated on the handle (B1, B2, B3, B4, B5, B6, B7, B8, R1, R2, R3, R4) is characterized by a dedicated and unique cable number.

## CONFIGURATIONS OF COMPLETE HANDLES



handle	front arrangement	rear arrangement
<b>EHC1</b>	<b>F06</b>	<b>R00</b>

Handle with 6 push-buttons in the front arrangement (B1, B2, B3, B4, B5 and B6) and NO push-button in rear arrangement.

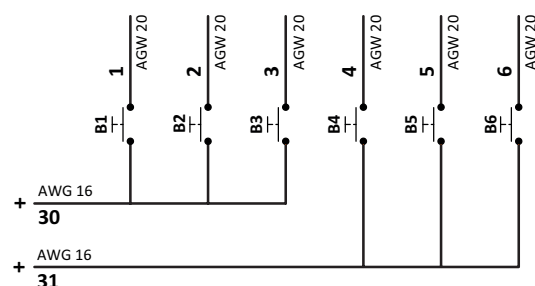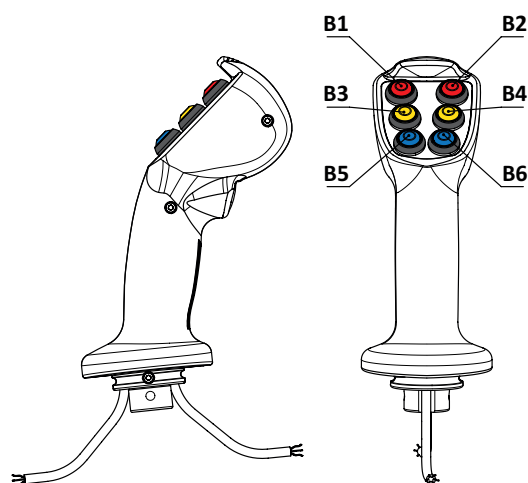



handle	front arrangement	rear arrangement
<b>EHC1</b>	<b>F04</b>	<b>R03</b>

Handle with 4 push-buttons in the front arrangement (B1, B2, B5 and B6) and 2 push-button in rear arrangement (B7 and dead man, B8).

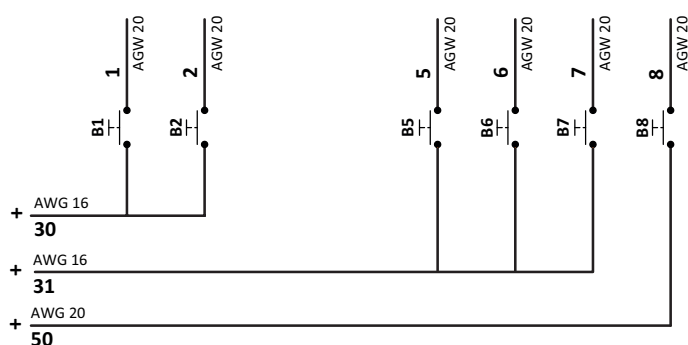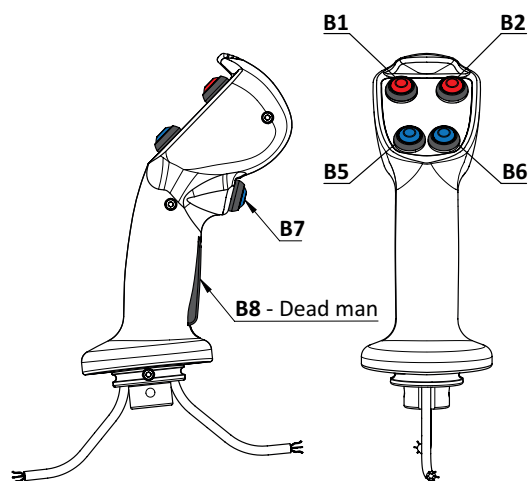



handle	front arrangement	rear arrangement
EHC1	F22	R02

Handle with 2 push-buttons (B5 and B6) and 2 Rollers (R1 and R2) in the front arrangement and 1 push-button in rear arrangement (dead man, B8).

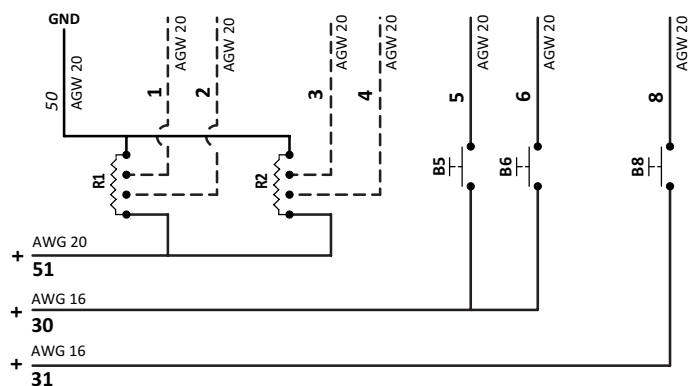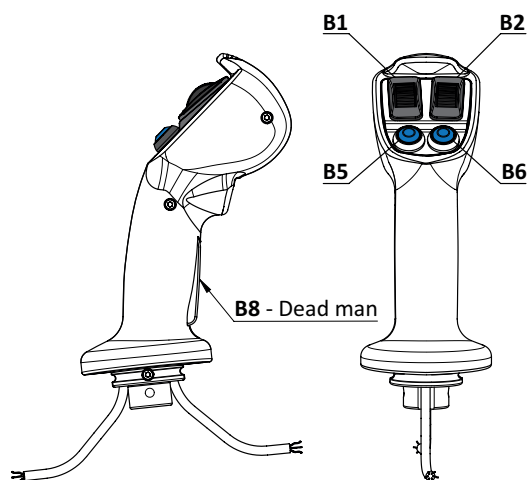

handle	front arrangement	rear arrangement
EHC1	F52	R01

Handle with 2 push-buttons (B5 and B6) and 1 Rocker ON/OFF/ON (R4) in the front arrangement and 1 push-button in rear arrangement (B7).

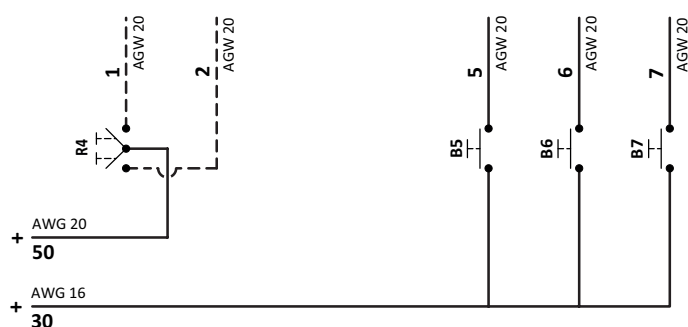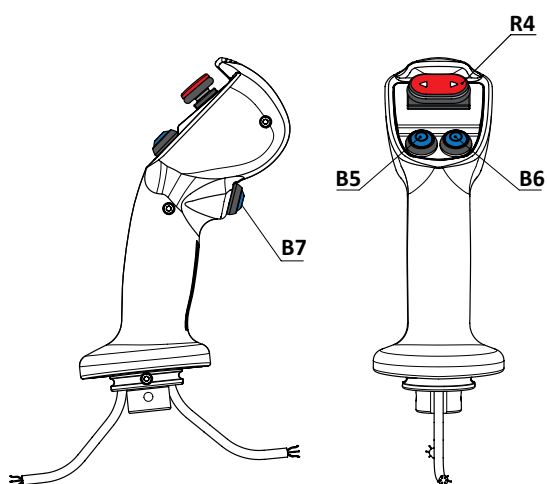

[illegible]



engineering beyond imagination

**EBI MOTION CONTROLS S.r.l**

Via Andrea Costa 11/2 40057  
Cadriano Fraz. di Granarolo dell'Emilia (BO)  
TEL. +39 051.0188.800  
FAX 051.701.093

[info@ebimc.com](mailto:info@ebimc.com)  
[www.ebimc.com](http://www.ebimc.com)